


Dosing is based on pool size with no probes to clean or calibrate for simple management and reliability.

- ✓ Integrates with the NKD-R and NKD-C Freshwater Systems
- ✓ Plug and play
- ✓ Adjustable running and priming timers
- ✓ High quality peristaltic pump motor
- ✓ Superior chemical resistance

- Probe Free doses acid based on size of the swimming pool
- ✓ PVC rollers ensuring low wear and tear
- ✓ Quality squeeze tube Tygon® MF Norprene®
- ✓ IP34 Rated
- ✓ 12 months warranty

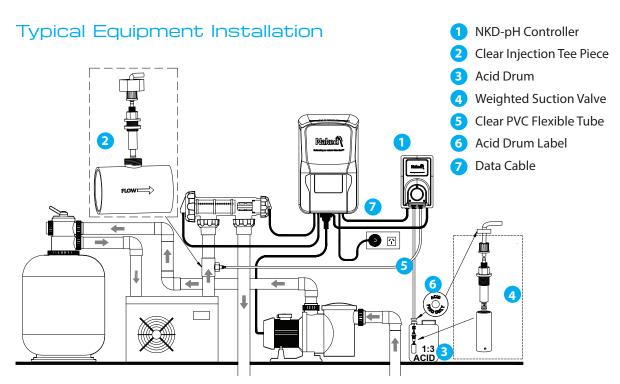

| Volts Input (Vac)220-245Amps Input - Max. (Aac)1.00Total Power Consumption (W)13W Motor - 20W TotalFrequency (Hz)50pH Controller Dimensions (mm)135W x 225H x 123DOutput Controlled by Sanitiser (LPH)0-1.0Rated Pressure (kPa)350Squeeze TubeTygon* Norprene* (Commercial spec)Motor Speed (RPM)10Non-Return Injector ValvePVC with viton sleeveTubing6m x 6mm Clear PVC Flexible TubeRoller BlockHeavy-duty PVCPower CordApproved piggy-back typeWater Connection40/50mm | Specifications | |
|---|--------------------------------------|------------------------------------|
| Total Power Consumption (W) Frequency (Hz) 50 pH Controller Dimensions (mm) 135W x 225H x 123D Output Controlled by Sanitiser (LPH) 0-1.0 Rated Pressure (kPa) 350 Squeeze Tube Tygon* Norprene* (Commercial spec) Motor Speed (RPM) 10 Non-Return Injector Valve PVC with viton sleeve Tubing Roller Block Heavy-duty PVC Power Cord Approved piggy-back type Water Connection | Volts Input (Vac) | 220-245 |
| Frequency (Hz) 50 pH Controller Dimensions (mm) 135W x 225H x 123D Output Controlled by Sanitiser (LPH) 0-1.0 Rated Pressure (kPa) 350 Squeeze Tube Tygon® Norprene® (Commercial spec) Motor Speed (RPM) 10 Non-Return Injector Valve PVC with viton sleeve Tubing 6m x 6mm Clear PVC Flexible Tube Roller Block Heavy-duty PVC Power Cord Approved piggy-back type Water Connection 40/50mm | Amps Input - Max. (Aac) | 1.00 |
| pH Controller Dimensions (mm) Output Controlled by Sanitiser (LPH) Rated Pressure (kPa) Squeeze Tube Tygon® Norprene® (Commercial spec) Motor Speed (RPM) Non-Return Injector Valve Tubing Roller Block Heavy-duty PVC Power Cord Water Connection 135W x 225H x 123D 0-1.0 10 Non-Return 10 Tygon® Norprene® (Commercial spec) Norprene® (Commercial spec) Hower Commercial spec) Hower Commercial spec) Hower Commercial spec) Heavy-duty PVC Approved piggy-back type Water Connection 40/50mm | Total Power Consumption (W) | 13W Motor - 20W Total |
| Output Controlled by Sanitiser (LPH) Rated Pressure (kPa) Squeeze Tube Motor Speed (RPM) Non-Return Injector Valve Tubing Roller Block Power Cord Water Connection O-1.0 O-1.0 O-1.0 O-1.0 O-1.0 O-1.0 O-1.0 NorPeturn (Commercial spec) Tygon® Norprene® (Commercial spec) Norprene® (Commercial spec) Motor Speed (RPM) 10 NorPeturn Injector Valve PVC with viton sleeve Heavy-duty PVC Flexible Tube Approved piggy-back type Water Connection 40/50mm | Frequency (Hz) | 50 |
| Rated Pressure (kPa)350Squeeze TubeTygon® Norprene® (Commercial spec)Motor Speed (RPM)10Non-Return Injector ValvePVC with viton sleeveTubing6m x 6mm Clear PVC Flexible TubeRoller BlockHeavy-duty PVCPower CordApproved piggy-back typeWater Connection40/50mm | pH Controller Dimensions (mm) | 135W x 225H x 123D |
| Squeeze TubeTygon® Norprene® (Commercial spec)Motor Speed (RPM)10Non-Return Injector ValvePVC with viton sleeveTubing6m x 6mm Clear PVC Flexible TubeRoller BlockHeavy-duty PVCPower CordApproved piggy-back typeWater Connection40/50mm | Output Controlled by Sanitiser (LPH) | 0-1.0 |
| Motor Speed (RPM) 10 Non-Return Injector Valve Tubing Roller Block Peavy-duty PVC Power Cord Approved piggy-back type Water Connection 10 PVC with viton sleeve PVC Flexible Tube Heavy-duty PVC Approved piggy-back type 40/50mm | Rated Pressure (kPa) | 350 |
| Non-Return Injector ValvePVC with viton sleeveTubing6m x 6mm Clear PVC Flexible TubeRoller BlockHeavy-duty PVCPower CordApproved piggy-back typeWater Connection40/50mm | Squeeze Tube | Tygon® Norprene® (Commercial spec) |
| Tubing 6m x 6mm Clear PVC Flexible Tube Roller Block Heavy-duty PVC Power Cord Approved piggy-back type Water Connection 40/50mm | Motor Speed (RPM) | 10 |
| Roller Block Heavy-duty PVC Power Cord Approved piggy-back type Water Connection 40/50mm | Non-Return Injector Valve | PVC with viton sleeve |
| Power Cord Approved piggy-back type Water Connection 40/50mm | Tubing | 6m x 6mm Clear PVC Flexible Tube |
| Water Connection 40/50mm | Roller Block | Heavy-duty PVC |
| | Power Cord | Approved piggy-back type |
| Water Flow Rate (I /min) 80-650 | Water Connection | 40/50mm |
| water now hate (L/min) | Water Flow Rate (L/min) | 80-650 |
| IP Rating 34 | IP Rating | 34 |
| Net Weight (kg) 2.5 | Net Weight (kg) | 2.5 |



HEAD OFFICE


40/2 Moo.14 KingKaew Rd, Rachatheva, Bangplee, Samutprakarn, 10540 Thailand Tel 0-2738-5088-98

Fax 0-2738-5299 Email projects@poolspa.co.th sales@poolspa.co.th

โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนทิ่งแท้ว ตำบสราชาเทวะ อำเภอบางพลี จังหวัดสมุทรปราการ 10540

โทร 0-2738-5088-99 แฟกซ์ 0-2738-5299 อีเมลล์ projects@poolspa.co.th sales@poolspa.co.th



poolspathailand

