

Sand Filter System **FSM SERIES**

EASY TO SETUP AND OPERATE

For residential and semi-commercial pools



Product Features

1. PVC & ABS lateral system
2. Unique one-piece clamp with screw-type lock design to simplify installation and allow tool-free servicing
3. Oil filled pressure gauge for easy inspection of the operation pressure
4. Combine with SPH Series pump which is self-priming up to 3.3m above water level, with IPX5 waterproof standard certified and built-in thermal protected

 **Emaux**
water technology

Sand Filter System - FSM Series

For residential and semi-commercial pools

Max Operating Pressure

40psi(2.8bar)

Max Temperature

50°C (122°F)

Suggested Size Of Media


0.5-0.8mm



RoHS
COMPLIANT
2002/95/EC




SAA

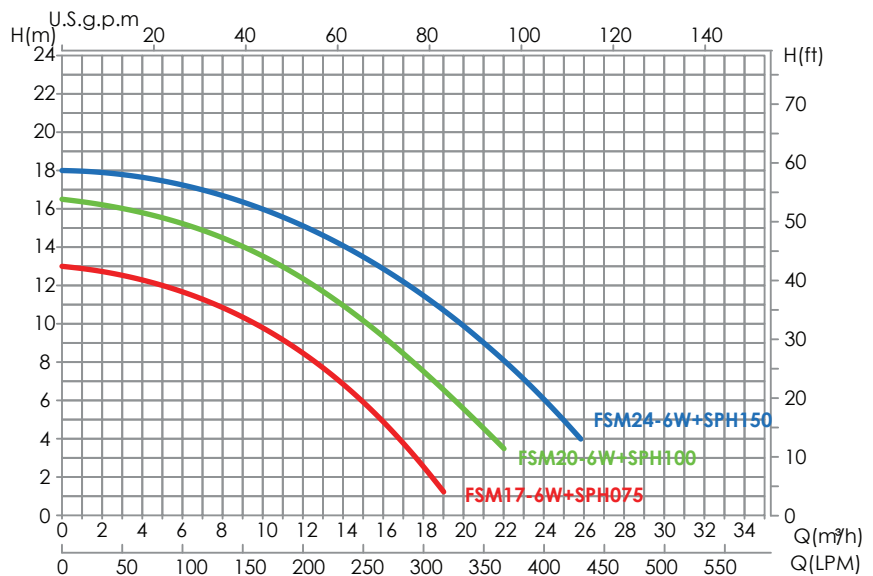

Product Information and Dimension

Code	Model	Filter	Pump	Sand (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Filter & Pump In/Out Connection
9070602	FSM17-6W+SPH075	MFV17	SPH075	40	195	816	762.5	652	1.5" / 50 mm
9070603	FSM20-6W+SPH100	MFV20	SPH100	70	225	889	800	652	1.5" / 50 mm
9070604	FSM24-6W+SPH150	MFV24	SPH150	125	280	980	850	652	1.5" / 50 mm

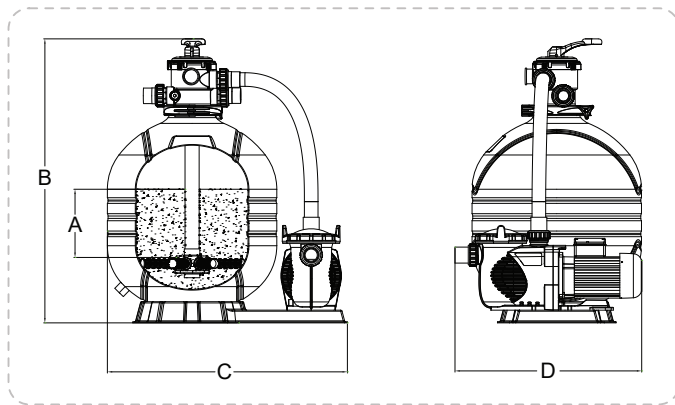

FSM Filtration Combo

includes:

- 1) Durable top mount plastic filter tank (Max Series Filter)
- 2) 6-Way Multiport Valve
- 3) SPH Series Pump




HEAD OFFICE

40/2 Moo.14 KingKaew Rd, Rachatheva,
Bangplee, Samutprakarn, 10540 Thailand
Tel 0-2738-5088-98
Fax 0-2738-5299
Email projects@poolspa.co.th
sales@poolspa.co.th

โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนกิ่งแก้ว ตำบลราชาเทวะ
อำเภอบางพลี จังหวัดสมุทรปราการ 10540
โทร 0-2738-5088-99
แฟกซ์ 0-2738-5299
อีเมล projects@poolspa.co.th
sales@poolspa.co.th



poolspathailand