

E-Power Pump

HIGH PERFORMANCE & HEAVY DUTY

For residential and semi-commercial pools



 **Emaux**
water technology



SAA

Pool & Spa Equipment

SIGNATURE COLLECTION

Product Features

- 1) Asynchronous, two-pole motor
- 2) Class insulation: 130(B)
- 3) IPX5 Waterproof standard
- 4) Built-in thermal protection
- 5) Overload protection
- 6) Available in 50Hz or 60Hz for 220V/380V
- 7) Special designed unions compatible for both imperial and metric measurement standards
- 8) Imperial and Metric measurement standard
- 9) 316 Stainless steel shaft
- 10) 316 Stainless steel mechanical seal
- 11) Self-Priming up to 2.5m above water level
- 12) Testing pressure 50 PSI (3.5 Bar)
- 13) Basket Volume 5 litres


**Ring lock seal design eliminates suction leaks
and maximizes suction efficiency**



A High-Performing Self-Priming Pump





Technical Information

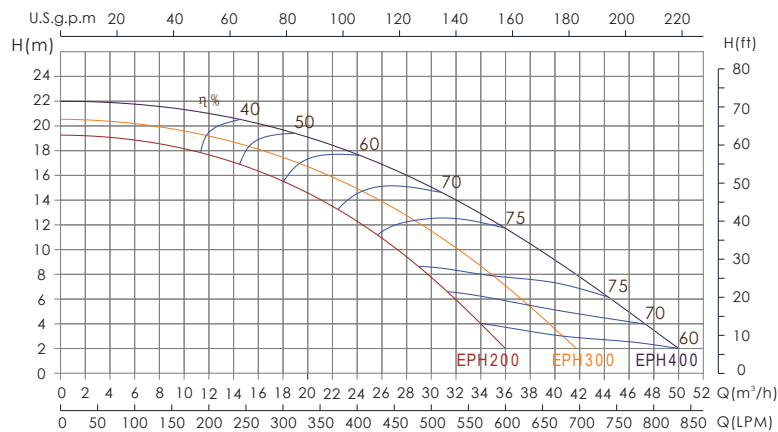

Model 50Hz	Input (kW)	Current (AMP)	Noise (dB)	Head (m)					
				6	8	10	12	14	16
				Flow Rate (m³/h)					
EPH200	1.8	8.2	68	32	30	27	24	21	17
EPH300	2.2	10.0	69	37	35	32	29	26	22
EPH400	2.8	12.5	71	45	42	39	36	32	28

Code 220V/50Hz	Code 220V/60Hz	Code 380V/50Hz	Model	Connection Size	Horsepower	Weight (kg)
88020708	88021008	88020808	EPH200	2" / 63mm 2.5" / 75mm	2.0hp	23.0
88020709	88021009	88020809	EPH300	2" / 63mm 2.5" / 75mm	3.0hp	24.0
88020718	88021018	88020818	EPH400	2" / 63mm 2.5" / 75mm	4.0hp	25.0

Product Dimensions

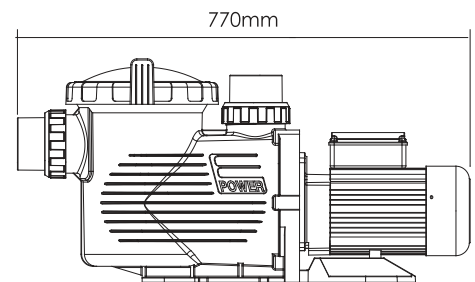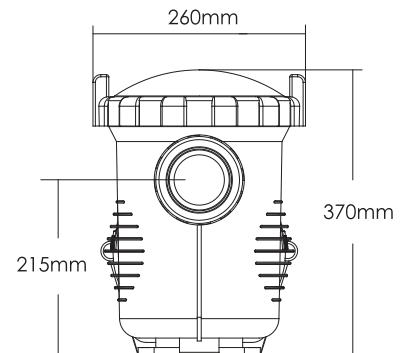



HEAD OFFICE

40/2 Moo.14 KingKaew Rd, Rachatheva,
Bangplee, Samutprakarn, 10540 Thailand

Tel 0-2738-5088-98

Fax 0-2738-5299

Email projects@poolspa.co.th
sales@poolspa.co.th

โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนกิ่งแก้ว ตำบลราชาเทวะ
อำเภอบางพลี จังหวัดสมุทรปราการ 10540

โทร 0-2738-5088-99

แฟกซ์ 0-2738-5299

อีเมล projects@poolspa.co.th
sales@poolspa.co.th



www.poolspa.co.th



[poolspathailand](https://www.facebook.com/poolspathailand)