



**PURE CHLORINE &  
EASY OPERATION**

## SSCnano Salt Chlorinator

For Above and Inground Pool



## COMPACT AND SIMPLE INSTALLATION

Emaux SSCnano is simple to install, with basic plumbing and electrical connections, you can have the system up and running in no time. It is compact and easily fits for pool and spa. Compact design makes it can easily fit into tight spaces without compromising its functionality. The control is designed to be user-friendly, making it easy to set up and operate, allows you to adjust the chlorine production according to your specific needs. You can tailor the chlorine output to maintain the desired sanitization level for your pool or spa.



CE IPX4

### Product feature:

- ON/OFF operation
- Water flow switch
- Auto self cleaning reverse polarity
- Temperature sensor
- Long cell life


Salt level alert

Adjustable chlorine production time

Preset timer



## Installation Diagram

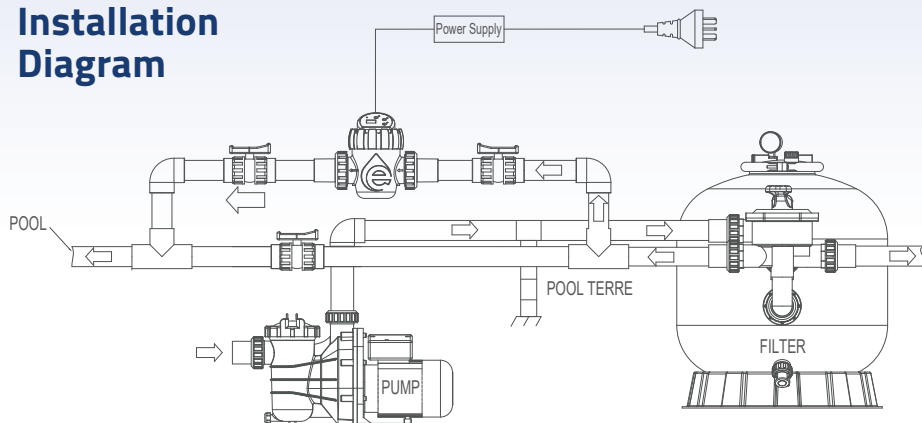

Material

PMMA / ABS

Operation Voltage

110V - 240V

Max. pool volume

20 m<sup>3</sup> - 50 m<sup>3</sup>

Salt Level

3500 ppm


Working Temperature

10 - 45 °C


Waterproof Standard

IPX4


3 installation methods:

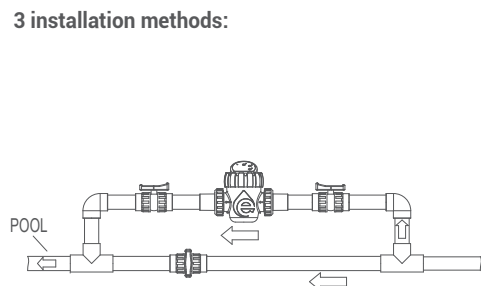

Horizontal Installation




Vertical Installation



Flexi hose connector Installation

## Accessories & Power Supply:



50mm (1 1/2") union

32mm (1 1/4") &  
38mm (1 1/2")  
Flexi hose connector






Mounting stand



Switch mode  
power supply

## Product Information

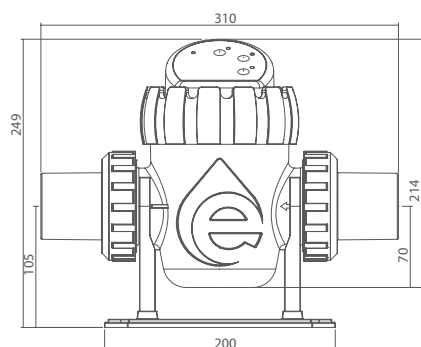

| Code    | Model     | Input Voltage/<br>Frequency | Salt Level  | Cell<br>production<br>rate | Maximum<br>working<br>pressure | Cell<br>Connections                        | Working<br>Temperature | Min.<br>Flow         | Max.<br>Pool<br>Volume |
|---------|-----------|-----------------------------|-------------|----------------------------|--------------------------------|--|------------------------|----------------------|------------------------|
| 9130045 | SSCnano4  | 110 - 240 V<br>/ 50-60 Hz   | 3500<br>ppm | 4 g/hr                     | 2.5 bar                        | 1.5" / 50mm<br>and 32mm<br>& 38mm<br>union | 10-45 °C               | 3 m <sup>3</sup> /hr | 20 m <sup>3</sup>      |
| 9130046 | SSCnano6  |                             |             | 6 g/hr                     |                                |  |                        |                      | 30 m <sup>3</sup>      |
| 9130047 | SSCnano8  |                             |             | 8 g/hr                     |                                |  |                        |                      | 40 m <sup>3</sup>      |
| 9130048 | SSCnano10 |                             |             | 10 g/hr                    |                                |  |                        |                      | 50 m <sup>3</sup>      |





**EMAUX WATER TECHNOLOGY CO., LTD**

ADDRESS: Flat A-D, 20/F., Kai Bo 22, 22 Wing Kin Road,  
Kwai Chung, HK

PHONE +852 2832 9880

[www.emauxgroup.com](http://www.emauxgroup.com)

 **YOUR PREMIER SUPPLIER**