

NEW

Enjoy the big benefits  
of freshwater, in a MINI.

## NKD-M

Introducing the MINI, our all-new NKD-M freshwater system for small pools and swim spas.

Enjoy all the benefits of Australia's favourite and most awarded freshwater pool system, tailored for pools and swim spas up to 30,000 litres.



**Naked**  
Freshwater Pool Systems

1800 625 331

sales@naked-pools.com

www.naked-pools.com



# The big benefits of freshwater in a MINI

Built upon the success of the award-winning NKD-R Freshwater System, The NKD-M is specifically designed to meet the needs of smaller pools, such as plunge pools and swim spas.

The NKD-M leverages the same advanced oxidation and ionisation technologies that have made the NKD-R system a favourite among pool owners. By utilising natural minerals like


copper and silver, the NKD-M provides a refreshing swimming experience that is gentle on the skin and environmentally friendly. This technology not only ensures crystal clear water but also significantly reduces the need for harsh chemicals, making it an ideal choice for those with sensitive skin or allergies.

## Typical equipment installation

● Pool components

○ Optional NKD-pH components

➔ Direction of water flow

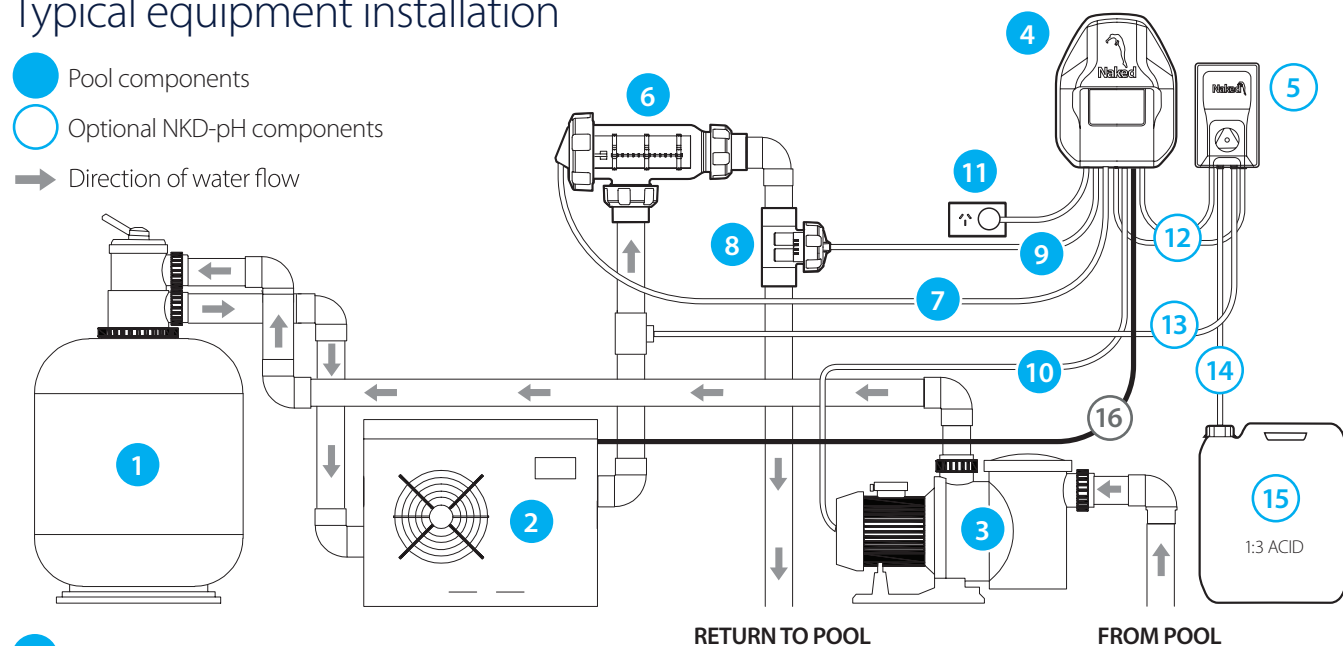

- 1 Filter
- 2 Heater
- 3 Pump
- 4 Control Unit
- 5 pH Controller
- 6 OXI Cell Housing
- 7 OXI Cable
- 8 ION Housing
- 9 ION Cable
- 10 Pump mains power cable
- 11 Control Unit mains power cable
- 12 pH Data Cable
- 13 Clear PVC Flexible Tube and Injection Tee
- 14 Clear PVC Flexible Tube
- 15 Acid Drum with weighted Suction Valve
- 16 Heat Pump Interface Cable

### SPECIFICATIONS

Volts Input (Vac)	220-265
Amps Input (Aac)	0.4
Total Power Consumption (W)	93
OXI Volts Output (Vdc)	10.3
OXI Amps Output (Adc)	5
Chlorine (g/hr)	10 @ 800ppm TDS
Frequency (Hz)	50/60
Pump Outlet Rating (Aac)	9.4
Control Unit Dimensions (mm)	204W x 286H x 105D
Cell Housing Dimensions (mm)	356L x 145D x 203H
Ioniser Housing Dimensions (mm)	158L x 100D x 138H
Cell Design	9 Plate 140 x 60mm
Water Connection	40/50 mm
Water Flow Rate (L/min)	80 - 550
IP Rating	23
Unit Shipping Dimensions (mm)	452L x 430W x 206H
Net Weight (kg)	9.5

All measurements conducted at 26 degrees celcius water temperature and ideal TDS



#### HEAD OFFICE

40/2 Moo.14 KingKaew Rd, Rachatheva,  
Bangplee, Samutprakarn, 10540 Thailand  
Tel 0-2738-5088-98  
Fax 0-2738-5299  
Email projects@poolspa.co.th  
sales@poolspa.co.th

#### โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนกิ่งแก้ว ตำบลราชาเทวะ  
อำเภอบางพลี จังหวัดสมุทรปราการ 10540  
โทร 0-2738-5088-99  
แฟกซ์ 0-2738-5299  
อีเมล projects@poolspa.co.th  
sales@poolspa.co.th

