

Cartridge Filter **CF SERIES**

COMPACT AND LIGHTWEIGHT

For residential pool and spa



UV resistant tank

Max Operating Pressure

250kPa/36psi(2.5bar)

Max Temperature

40°C (104°F)

Pool & Spa Equipment

 **Emaux**
water technology

www.emauxgroup.com

CF Series Cartridge Filter

comes with an UV resistant tank and a heavy duty ring-lock lid which allows easy cleaning and replacement of the cartridge element. Also there is a screw type air bleeder for easy removal of trapped air inside the filter tank. High quality oil-filled pressure gauge is provided for easy inspection of the operation pressure.

Product Information:



Code	Model	Filter Area (m ²)	Valve Connections	Max Flow Rate	A mm	B mm	C mm
88060101	CF25	2.25	1.5" / 50mm	92lpm 5.5m ³ /h	445	387	225
88060102	CF50	4.63	1.5" / 50mm	190lpm 11.4m ³ /h	625	567	225
88060103	CF75	7.00	1.5" / 50mm	283lpm 17.0m ³ /h	805	747	225
88060104	CF100	9.40	2.0" / 63mm	382lpm 22.9m ³ /h	985	927	225
88060105	CF150	13.72	2.0" / 63mm	555lpm 33.4m ³ /h	1165	1107	225
88060106	CF200	16.82	2.0" / 63mm	680lpm 40.9m ³ /h	1345	1287	225



- CF Series Filter is equipped with :
1. universal standard of union connection
 2. pressure gauge
 3. cartridge filter element

Cartridge Filter Element:

Code	Model	D mm	E mm	Micron µm	Fold Number
88270101	CF25-CE	Ø183	184.5	≤15	150
88270102	CF50-CE	Ø183	364.5	≤15	150
88270103	CF75-CE	Ø183	544.5	≤15	150
88270104	CF100-CE	Ø183	724.5	≤15	150
88270105	CF150-CE	Ø183	904.5	≤15	175
88270106	CF200-CE	Ø183	544.5 x 2	≤15	180

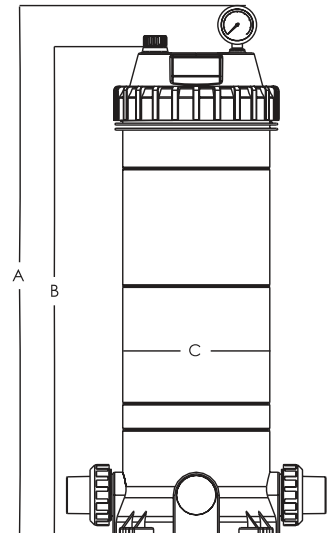


HEAD OFFICE

40/2 Moo.14 KingKaew Rd, Rachatheva,
Bangplee, Samutprakarn, 10540 Thailand
Tel 0-2738-5088-98
Fax 0-2738-5299
Email projects@poolspa.co.th
sales@poolspa.co.th

โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนกิ่งแก้ว ตำบลราชาเทวะ
อำเภอบางพลี จังหวัดสมุทรปราการ 10540
โทร 0-2738-5088-99
แฟกซ์ 0-2738-5299
อีเมล projects@poolspa.co.th
sales@poolspa.co.th



poolspathailand