

L I G H T U P Y O U R D R E A M



LED POOL LIGHT



2024

Catalogue

S.S.316L Nicheless Slim LED Pool Light

HOTOOK®



35 / 18 W



12 W



8 W



Patent



Ultra thin



12V

Advantages

- Fully resin filled, 100% waterproof
- 316L Stainless steel for marine water
- Ultra slim design in 7.5 - 8.0 mm thickness
- Suitable for Concrete Pool
- Patented 2 in 1 installation methods
 - Method 01 : Ø1/2" PVC.Conduit
 - Method 02 : Ø3/4" PVC.Conduit

Optional Color


Single colour :
- AC 12V (2-wires)

CW (6500K) WW (3000K) Blue


RGB colour :
- DC 12V (4-wires)
- External/Wi-Fi control method



Lights Graph

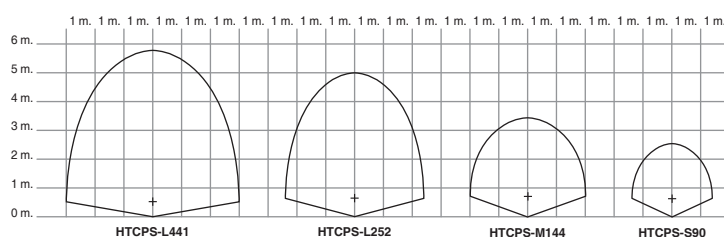

Dimension

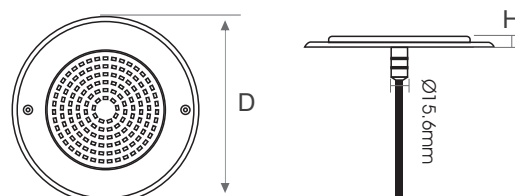

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-S-S90-CW	8 W	AC/DC12V	Cool White (6500K)	SS316L	Silver	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-S-S90-WW	8 W	AC/DC12V	Warm White (3000K)	SS316L	Silver	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-S-S90-B	8 W	AC/DC12V	Blue	SS316L	Silver	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-S-S90-RGB	8 W	DC12V	RGB	SS316L	Silver	SMD2835	120°	90 pcs	100lm/w	96*8mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-S-M144-CW	12 W	AC/DC12V	Cool White (6500K)	SS316L	Silver	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-S-M144-WW	12 W	AC/DC12V	Warm White (3000K)	SS316L	Silver	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-S-M144-B	12 W	AC/DC12V	Blue	SS316L	Silver	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-S-M144-RGB	12 W	DC12V	RGB	SS316L	Silver	SMD2835	120°	144 pcs	100lm/w	155*7.5mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-S-L252-CW	18 W	AC/DC12V	Cool White (6500K)	SS316L	Silver	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-S-L252-WW	18 W	AC/DC12V	Warm White (3000K)	SS316L	Silver	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-S-L252-B	18 W	AC/DC12V	Blue	SS316L	Silver	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-S-L252-RGB	18 W	DC12V	RGB	SS316L	Silver	SMD2835	120°	252 pcs	100lm/w	257*7.5mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-S-L441-CW	35 W	AC/DC12V	Cool White (6500K)	SS316L	Silver	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-S-L441-WW	35 W	AC/DC12V	Warm White (3000K)	SS316L	Silver	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-S-L441-B	35 W	AC/DC12V	Blue	SS316L	Silver	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-S-L441-RGB	35 W	DC12V	RGB	SS316L	Silver	SMD2835	120°	441 pcs	100lm/w	257*7.5mm





35 / 18 W



12 W



8 W



Patent



Ultra thin





12V


Advantages

- Fully resin filled, 100% waterproof
- 316L Stainless steel for marine water
- Ultra slim design in 7.5 - 8.0 mm thickness
- Suitable for Concrete Pool
- Patented 2 in 1 installation methods
 - Method 01 : Ø1/2" PVC.Conduit
 - Method 02 : Ø3/4" PVC.Conduit


Optional Color



Lights Graph

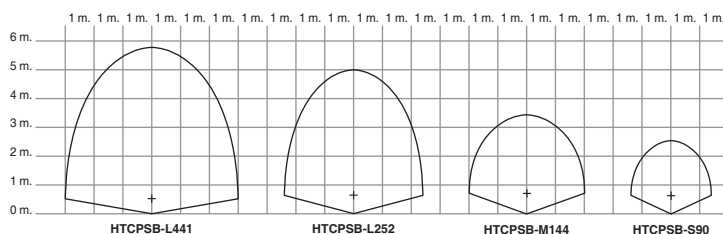

Dimension

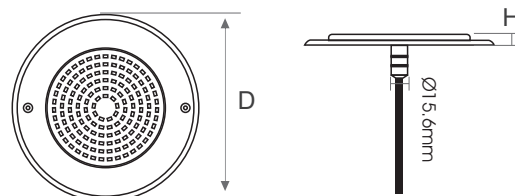

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-SB-S90-CW	8 W	AC/DC12V	Cool White (6500K)	SS316L	Black	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-SB-S90-WW	8 W	AC/DC12V	Warm White (3000K)	SS316L	Black	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-SB-S90-B	8 W	AC/DC12V	Blue	SS316L	Black	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-SB-S90-RGB	8 W	DC12V	RGB	SS316L	Black	SMD2835	120°	90 pcs	100lm/w	96*8mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-SB-M144-CW	12 W	AC/DC12V	Cool White (6500K)	SS316L	Black	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-SB-M144-WW	12 W	AC/DC12V	Warm White (3000K)	SS316L	Black	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-SB-M144-B	12 W	AC/DC12V	Blue	SS316L	Black	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-SB-M144-RGB	12 W	DC12V	RGB	SS316L	Black	SMD2835	120°	144 pcs	100lm/w	155*7.5mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-SB-L252-CW	18 W	AC/DC12V	Cool White (6500K)	SS316L	Black	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-SB-L252-WW	18 W	AC/DC12V	Warm White (3000K)	SS316L	Black	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-SB-L252-B	18 W	AC/DC12V	Blue	SS316L	Black	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-SB-L252-RGB	18 W	DC12V	RGB	SS316L	Black	SMD2835	120°	252 pcs	100lm/w	257*7.5mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-SB-L441-CW	35 W	AC/DC12V	Cool White (6500K)	SS316L	Black	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-SB-L441-WW	35 W	AC/DC12V	Warm White (3000K)	SS316L	Black	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-SB-L441-B	35 W	AC/DC12V	Blue	SS316L	Black	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-SB-L441-RGB	35 W	DC12V	RGB	SS316L	Black	SMD2835	120°	441 pcs	100lm/w	257*7.5mm



35 / 18 W



12 W



8 W



Patent



Ultra thin



12V

Advantages

- Fully resin filled, 100% waterproof
- Durable PC for marine water
- Ultra slim design in 7.5 - 8.0 mm thickness
- Suitable for Concrete Pool
- Patented 2 in 1 installation methods
- 4-wires external/wifi control method

Optional Color


Single colour :
- AC 12V (2-wires)

CW (6500K) WW (3000K) Blue


RGB colour :
- DC 12V (4-wires)
- External/Wi-Fi control method



Lights Graph

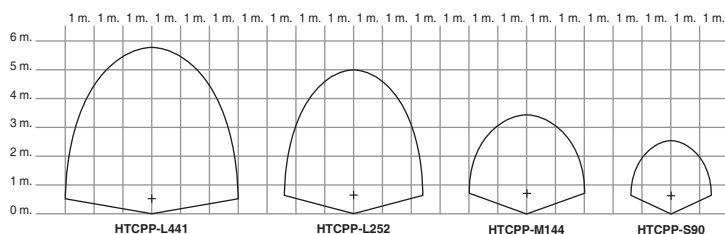

Dimension

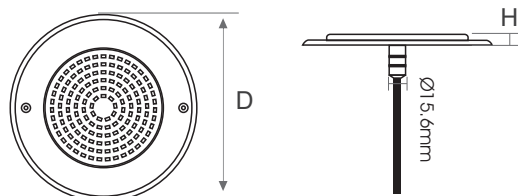


Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-P-S90-CW	8 W	AC/DC12V	Cool White (6500K)	Plastic	White	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-P-S90-WW	8 W	AC/DC12V	Warm White (3000K)	Plastic	White	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-P-S90-B	8 W	AC/DC12V	Blue	Plastic	White	SMD2835	120°	90 pcs	100lm/w	96*8mm
HTCP-P-S90-RGB	8 W	DC12V	RGB	Plastic	White	SMD2835	120°	90 pcs	100lm/w	96*8mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-P-M144-CW	12 W	AC/DC12V	Cool White (6500K)	Plastic	White	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-P-M144-WW	12 W	AC/DC12V	Warm White (3000K)	Plastic	White	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-P-M144-B	12 W	AC/DC12V	Blue	Plastic	White	SMD2835	120°	144 pcs	100lm/w	155*7.5mm
HTCP-P-M144-RGB	12 W	DC12V	RGB	Plastic	White	SMD2835	120°	144 pcs	100lm/w	155*7.5mm

Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-P-L252-CW	18 W	AC/DC12V	Cool White (6500K)	Plastic	White	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-P-L252-WW	18 W	AC/DC12V	Warm White (3000K)	Plastic	White	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-P-L252-B	18 W	AC/DC12V	Blue	Plastic	White	SMD2835	120°	252 pcs	100lm/w	257*7.5mm
HTCP-P-L252-RGB	18 W	DC12V	RGB	Plastic	White	SMD2835	120°	252 pcs	100lm/w	257*7.5mm


Model	Power	Voltage	Colour	Material	Flaceplate	LED Type	Beam Angle	LED QTY	Lumen	Dimension (D*H)
HTCP-P-L441-CW	35 W	AC/DC12V	Cool White (6500K)	Plastic	White	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-P-L441-WW	35 W	AC/DC12V	Warm White (3000K)	Plastic	White	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-P-L441-B	35 W	AC/DC12V	Blue	Plastic	White	SMD2835	120°	441 pcs	100lm/w	257*7.5mm
HTCP-P-L441-RGB	35 W	DC12V	RGB	Plastic	White	SMD2835	120°	441 pcs	100lm/w	257*7.5mm

Installation Method 01

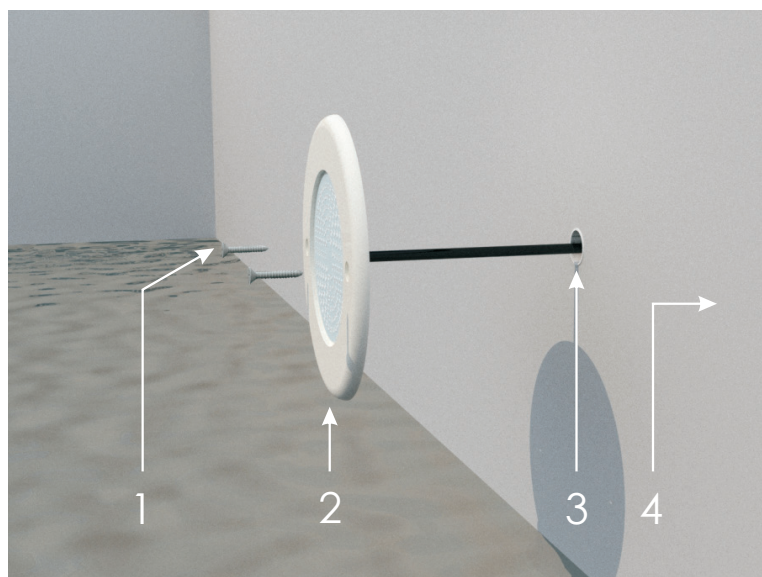


1. Screws
3. Conduit

2. Lamp
4. Pool wall

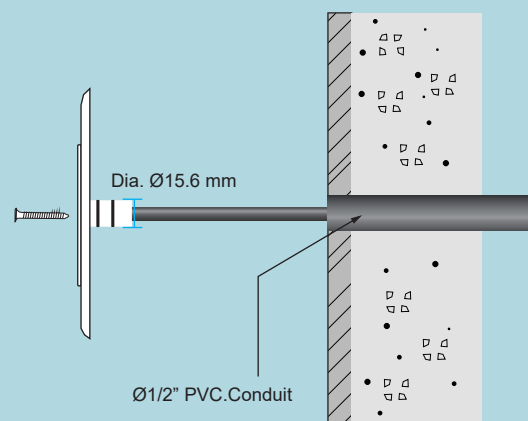

Installation Method 02

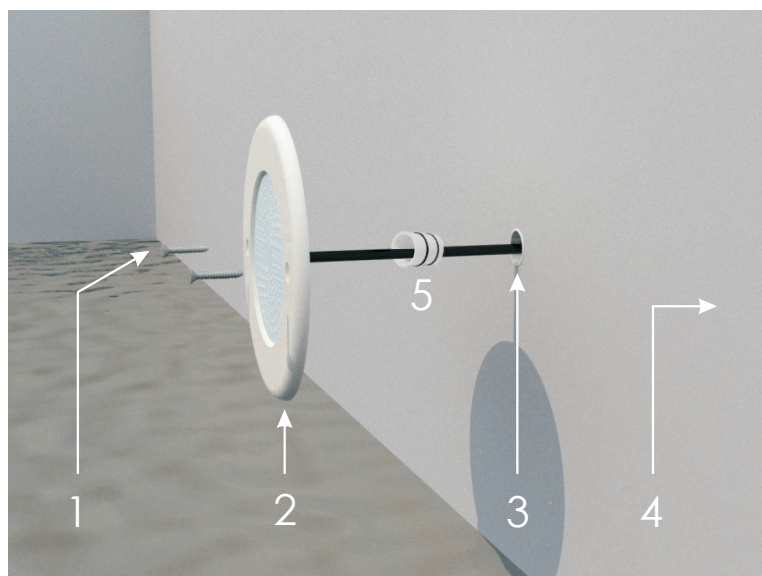


1. Screws
4. Pool wall

2. Lamp

3. Conduit

5. Accessory A

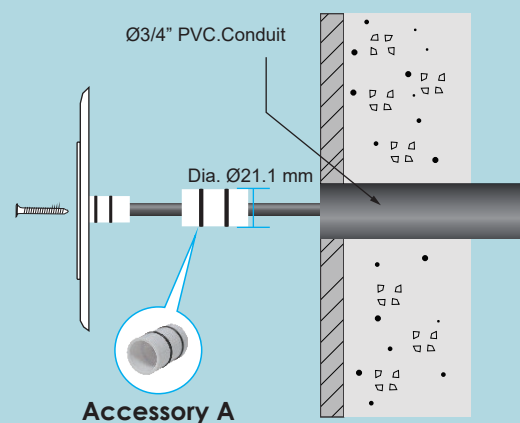

External / WiFi Controller



- Model : HT2EC
- Millions of color, DIY mood.
- With Mobile App control (Tuya App, Remote or Music)
- MAX. Power : 180 W
- Input voltage : DC12V



Magic Color



Music Control



App Control



Voice Control


IP67 DC12V Power Supply




Model	Power	Input Voltage	Output Voltage
TF - DC - 12V - 50W	50W	AC220V	DC12V
TF - DC - 12V - 100W	100W	AC220V	DC12V
TF - DC - 12V - 150W	150W	AC220V	DC12V
TF - DC - 12V - 200W	200W	AC220V	DC12V
TF - DC - 12V - 250W	250W	AC220V	DC12V
TF - DC - 12V - 300W	300W	AC220V	DC12V

Wire Diagram

For Single Color

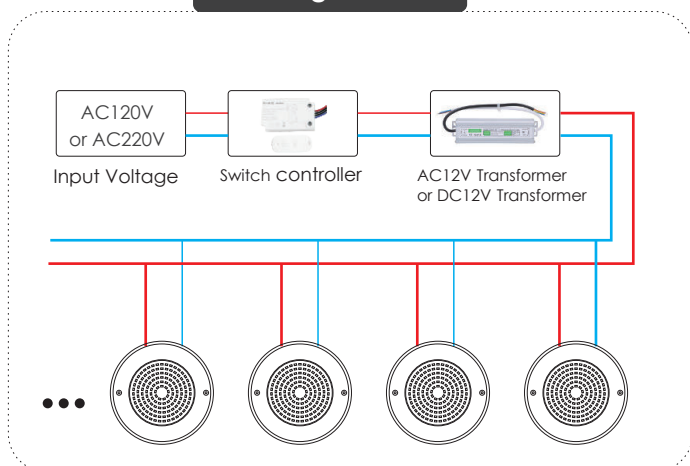

For RGB Color

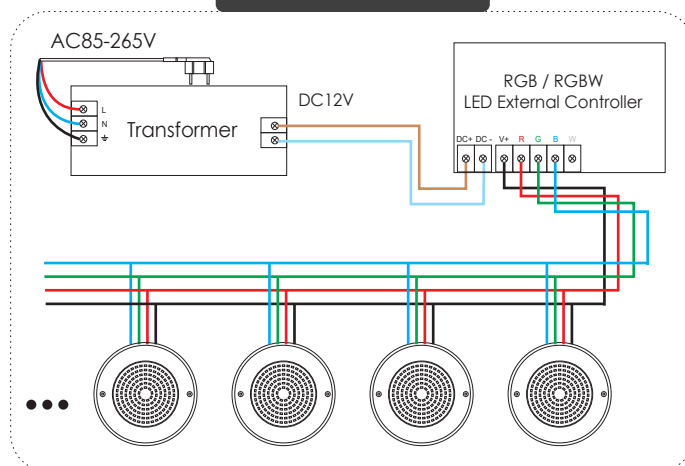




HEAD OFFICE

40/2 Moo.14 KingKaew Rd, Rachatheva,
Bangplee, Samutprakarn, 10540 Thailand

Tel 0-2738-5088-98

Fax 0-2738-5299

Email projects@poolspa.co.th
sales@poolspa.co.th



โชว์รูมและสำนักงานใหญ่

40/2 หมู่ 14 ถนนกิ่งแก้ว ตำบลราชาเทวะ
อำเภอบางพลี จังหวัดสมุทรปราการ 10540

โทร 0-2738-5088-99

แฟกซ์ 0-2738-5299

อีเมล projects@poolspa.co.th
sales@poolspa.co.th