

# HARVIA VEGA

HCBE900400S

*The stainless steel outer shell of Vega is durable and creates a modern look for your sauna. The operating switches are placed ergonomically in the upper part, and thanks to the symmetric shape of the heater, the switches can be placed on either side.*



## Features

Main material : Steel


H x W x D : 540.0 x 450.0 x 310.0 mm

Net weight (kg) : 10.8

Installation location : Wall

| ID          | GTIN          | Output (kW) | Sauna room size min - max m3 |
|-------------|---------------|-------------|------------------------------|
| HCBE900400S | 6410082608195 | 9 kW        | 8.0-14.0                     |

## Related products



SFE-220400




## Spare parts

| Product                              | ID        | Pcs |
|--------------------------------------|-----------|-----|
| Heating element 3000W 230V, Vega Pro | SPZSB-229 | 3   |
| Knob thermostat Vega, black          | SPZSB-115 | 1   |
| Timer 4+8h                           | SPZSK-510 | 1   |
|                                      | SPZSB-200 | 1   |


## Technical details

| Technical data                     | Type / attribute                                                               | HCBE900400S     |
|------------------------------------|--------------------------------------------------------------------------------|-----------------|
|                                    | Color                                                                          | Stainless Steel |
|                                    | Power output                                                                   | 9 kW            |
|                                    | Stone sizes                                                                    | Ø5–10 cm        |
|                                    | Stone amount (kg)                                                              | 20              |
| Dimensions                         | Product width                                                                  | 450             |
|                                    | Product height                                                                 | 540             |
|                                    | Product depth (mm)                                                             | 310             |
|                                    | Net weight (kg)                                                                | 10.8            |
|                                    | Gross weight                                                                   | 12.2            |
|                                    | Package width                                                                  | 315             |
|                                    | Package height                                                                 | 475             |
|                                    | Package depth                                                                  | 500             |
| Safety and installation dimensions | Safety distance front (non-combustible materials)                              | 100             |
|                                    | Safety distance front (combustible materials)                                  | 40              |
|                                    | Safety distance side (non-combustible materials)                               | 120             |
|                                    | safety distance to the side wall (combustible materials)                       | 40              |
|                                    | Safety distance (Ceiling)                                                      | 1100            |
|                                    | Room min. height(depends on connections and therefore from output, star/delta) | 1900            |
|                                    | Installation opening height                                                    | 1740            |
|                                    | Installation opening width                                                     | 505             |
|                                    | Installation opening depth                                                     | 330             |


## Technical images

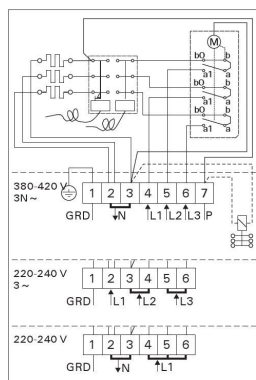


Electrical connections of BC heater  
Elektroanschlüsse des Saunaofens BC

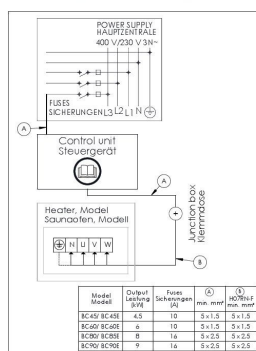

3-phase electrical connections of control  
unit C150 and BC-E heater  
3-phaseser Elektroanschlüsse des  
Steuergeräts C150 und des Saunaofens BC-E



Electrical connections of BC-E heater  
Elektroanschlüsse des Saunaofens BC-E

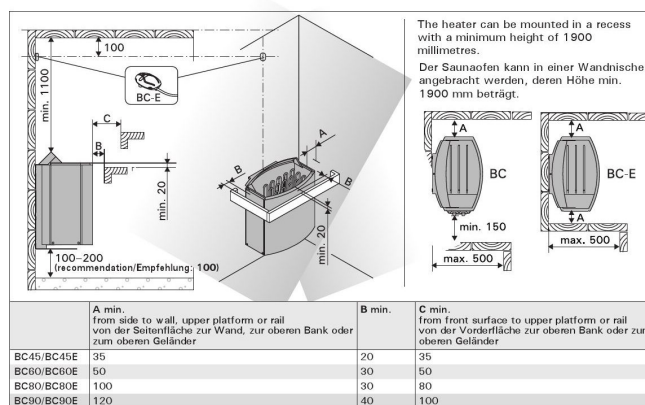

The heater can be mounted in a recess with a minimum height of 1900 millimetres.

Der Saunaofen kann in einer Wandnische angebracht werden, deren Höhe min. 1900 mm beträgt.

